

SINGLE GLOBE VALVE HOT OR COLD WATER STATION - 6000M-B & 6000BM-B SERIES

SuperKlean's single valve hot or cold water station was specifically designed to provide individual outlets of hot or cold water. The unit uses two connection nuts for superior flexibility during installation. SuperKlean's inlet & outlet have the same dimensions as most of our competitors' stations. Our stations come with a mounting plate for easy behind the unit cleanup and hose rack for easy user access to the hose.

Part #:	Description
6000M-B	Brass, single globe valve hot or cold water wall mounted station
6000BM-B	Brass, single ball valve hot or cold water wall mounted station



UNIT NOT FOR USE WITH STEAM

Principal Parts, Material & Ratings

Inlet / Outlet Diameter: 3/4" NPT

Station Body: Brass

Globe Style Valve: Brass / Stainless Steel

Ball Valve: Bronze / Stainless Steel

Maximum Globe Valve Pressure: 150 PSI

Maximum Ball Valve Pressure: 600 PSI WOG


Maximum Temperature: 200° F (93° C)

Weight: 10 Lbs. (6000M-B) & 8 Lbs. (6000BM-B)

STAINLESS STEEL WAND - D-WAND SERIES

SuperKlean's 3-foot stainless steel washdown wand was specifically designed to provide the user with a means of "reaching" desired washdown locations previously deemed unreachable by extending the nozzle by 3 feet. Our wand design incorporated a wand tip that is capable of changing spray pattern from fan spray to solid spray by simply "twisting" the tip until desired pattern is achieved as well as a quick disconnect feature that allows the user to quickly connect our wand to any of our DuraFlow spray nozzles or those of our competitors.

Part #:	Description
D-WAND	300 series stainless steel wand with quick disconnect and adjustable spray tip

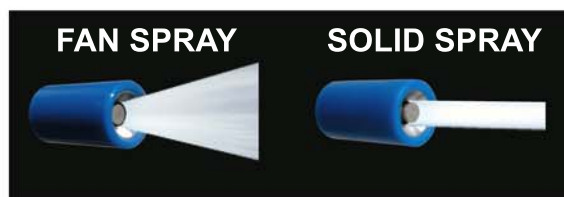

UNIT NOT FOR USE WITH STEAM

