SuperKlean™

Environmentally Exceptional Washdown Products

DuraFlow “Mini” Spray Nozzles

- Small, compact design.
- Fully insulated.
- 304 stainless steel construction.
- 1/2” female NPT inlet.

DM150S	
Inlet/Outlet Diameter: ½ ” NPT	
Nozzle Body: Stainless Steel. Epoxy resin coated.	
Cartridge: Stainless Steel	
Weight: 1.25 lbs	
Recommended Operative Conditions	
Maximum Pressure: 150 PSI	
Maximum Temperature: 200 °F (93 °C)	

Inlet Pressure (PSIG)	Flow Rate (GPM)
High Flow	
25	4.39
50	6.54
75	8.18
100	9.56
125	10.83
150	11.89
Low Flow*	
25	2.93
50	3.86
75	4.91
100	5.78
125	6.71
150	7.19

*Low flow rates can be achieved with the purchase of flow restrictor adapter (Part: 8-FR-NPT)

SuperKlean Washdown Products, 1 Edwards Court, Suite 101, Burlingame, CA 94010, USA
Tel: (650) 375-7001 Fax: (650) 375-7010
www.superklean.com

SuperKlean™

Environmentally Exceptional Washdown Products

DuraFlow “Mini” Spray Nozzles

Part #	Description
2-DMS	DuraFlow "Mini" lever, stainless steel. Plastic dip
3-DM	DuraFlow "Mini" nozzle lever bolt, stainless steel
4-DMDB	Nozzle cover, dark blue
4-DMR	Nozzle cover, red
4-DMW	Nozzle cover, white
7-DMS	Cartridge or “barrel assembly,” 304 stainless steel, contains all working parts

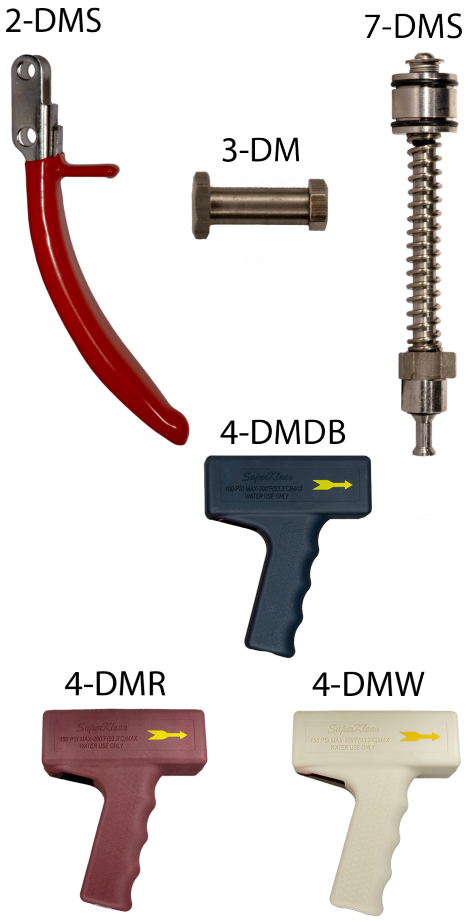

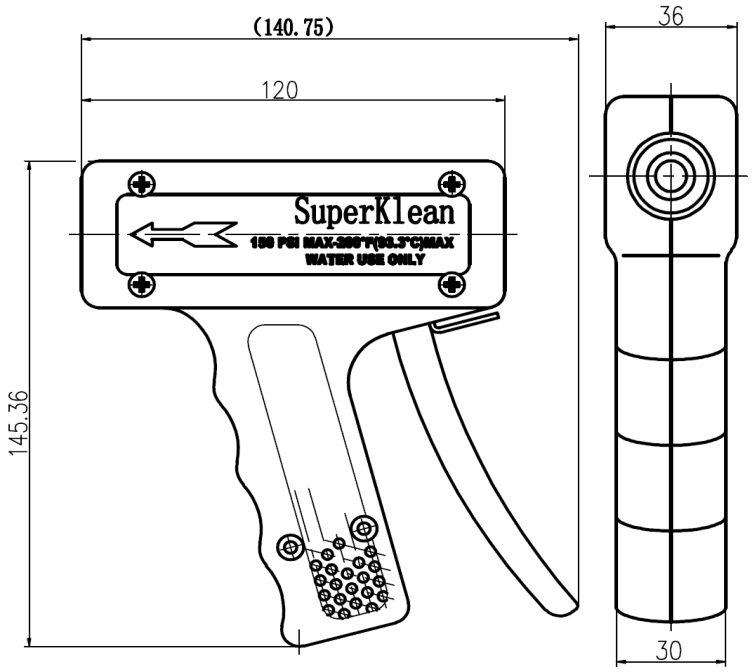

SuperKlean Washdown Products, 1 Edwards Court, Suite 101, Burlingame, CA 94010, USA
Tel: (650) 375-7001 Fax: (650) 375-7010
www.superklean.com