

SuperKlean

Environmentally Exceptional Hot Water Sanitation Products

DuraFlow X Spray Nozzles

Chemical and Bacteria Resistant

- Enhanced bacterial and chemical resistance.
- [Nozzle Chemical Resistance Guide](#)
- Front trigger guard cover designed to prevent accidental spray.
- Trigger lock mechanism built in.

DH150X

Inlet/Outlet Diameter: ½" NPT

Nozzle Body: Stainless Steel. Epoxy resin coated.

Cartridge: Stainless Steel

Weight: 1.5 lbs

Recommended Operative Conditions

Maximum Pressure: 150 PSI

Maximum Temperature: 200 °F (93 °C)

Inlet Pressure (PSIG)	Flow Rate (GPM)
-----------------------	-----------------

High Flow

25	4.39
----	------

50	6.54
----	------

75	8.18
----	------

100	9.56
-----	------

125	10.83
-----	-------

150	11.89
-----	-------

Low Flow*

25	2.93
----	------

50	3.86
----	------

75	4.91
----	------

100	5.78
-----	------

125	6.71
-----	------

150	7.19
-----	------

*Low flow rates can be achieved with the purchase of flow restrictor adapter (Part: 8-FR-NPT)



SuperKlean Washdown Products, 1 Edwards Court, Suite 101, Burlingame, CA 94010, USA

Tel: (650) 375-7001 Fax: (650) 375-7010

www.superklean.com


SuperKlean

Enviromentally Exceptional Hot Water Sanitation Products

DuraFlow X Spray Nozzles

Chemical and Bacteria Resistant

Part #	Description
2-X	DuraFlow X lever, stainless steel. Plastic dip
3-DH	DuraFlow series nozzles lever bolt, stainless steel
4-DHDB	Nozzle cover, dark blue
4-DHR	Nozzle cover, red
4-DHW	Nozzle cover, white

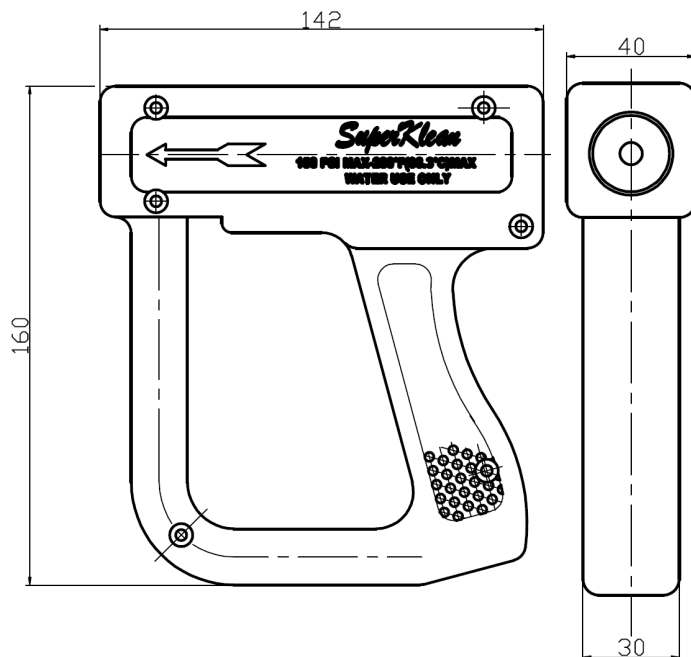

2-X



3-DH



4-DDB



4-DR



4-DW

